


Hi-bor®

BORATE PRESSURE TREATED WOOD

Product Information Guide

- For use in above ground weather protected structural framing in residential and commercial projects, such as residential dwellings, industrial buildings, or any application requiring wood protected against termites, carpenter ants, and fungal decay, including dry rot.
- Hi-bor Borate Pressure Treated Wood Products are backed by a 20-year limited warranty (See warranty for details.).
- Pressure treated with an EPA registered borate wood preservative for protection against termites, carpenter ants, and fungal decay.
- Hi-bor Borate Pressure Treated Lumber is recommended for sill plate, joists, studs, roof trusses, blocking, rafters, beams, and other framing applications.
- Hi-bor Borate Pressure Treated Plywood is recommended for wall sheathing, roof sheathing, and subfloors, where not exposed to wetting conditions.

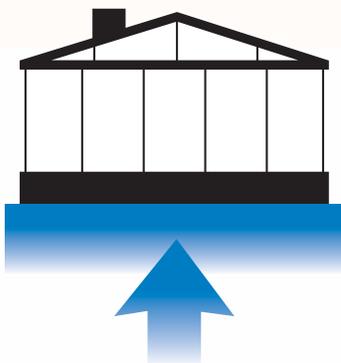

Soil Treatment as Required
by the Building Codes

- Roof Trusses
- Studs
- Wall Sheathing
- Roof Sheathing
- Joists & Rafters
- Sill Plates
- Many more uses

MATERIALS

- Hi-bor Borate Pressure Treated Wood is treated with Disodium Octaborate Tetrahydrate (DOT).
- Hi-bor Borate Pressure Treated Wood is accepted by Hawaii building codes, major model building codes, and it is supported by the ICC Legacy Report #NER-648.

WORKABILITY

- As with untreated wood, Hi-bor Borate Pressure Treated Wood may be sawn, drilled, or routed with standard woodworking equipment.
- Hi-bor Borate Pressure Treated Lumber is also recommended for fascia, trim, and miscellaneous wood applications, when properly protected from the weather (refer to limitations).
- Products may be fastened with standard (common) nails and screws. Check local building codes which may vary in requirements.

LIMITATIONS

- Hi-bor Borate Pressure Treated Wood is intended to be used for framing and applications where the wood is not in direct contact with the ground and is continuously protected from liquid water. Normal exposure to weather during ordinary installation will not adversely affect the performance of the product.
- Hi-bor Borate Pressure Treated Wood Products should not be used for outdoor structures exposed to weathering and rain.
- Facia and other exposed applications must be protected with primer and at least two coats of paint. Material must be allowed to dry before painting

TECHNICAL INFORMATION

- All products bear a permanent ink stamp or end tag carrying the Hi-bor trademark, a quality mark of an approved third party inspection agency, and the name of the treating company that produced the treated products.
- For further technical information and Safety Data Sheets, visit www.kopperspc.com/hi-bor.

JOB SITE STORAGE AND HANDLING

- As with untreated wood, it is necessary to keep Hi-bor Borate Pressure Treated Wood products dry by covering the material with plastic or storing the materials under shelter and elevating the material above the ground to allow for air circulation.
- Sheathing should be covered as soon as practical after installation. If wetted during initial construction, allow materials to properly dry before permanently enclosing with felt, wallboard, etc.
- After working with the wood, and before eating, drinking, and use of tobacco products, wash exposed areas thoroughly.

INSTALLATION

- Field treatment of all end cuts and borings, including plumbing and electrical holes is required on all lumber and timbers over 2" in thickness. Field treatment shall be either a 2% solution (copper metal basis) of Copper Naphthenate or a 10% solution of DOT, or another end coat preservative..

WARRANTY INFORMATION


Subject to certain requirements, exclusions and limitations, Koppers Performance Chemicals Inc. offers a 20-year limited warranty (subject to a maximum of \$5,000). The limited warranty applies only to Hi-bor Borate Pressure Treated Wood products installed by licensed contractors in Hawaii that meet all the conditions specified on the front and back of the warranty.

Hi-bor treated wood is recommended as part of an overall treated structural system. Hi-bor treated wood is only warranted for "TREATED STRUCTURAL SYSTEM" in which all interior house framing, the part of the house that provides structural stability, is constructed with Hi-bor treated wood and installed by a licensed contractor for maximum protection. Additional requirements for "TREATED STRUCTURAL SYSTEM" include:

- Soil treatment with an approved pesticide at the time of construction.
- Proper construction practices where no part of any exterior wall including stucco, hardboard, etc. is within four inches of final grade, and pesticide treatment and grouting of hollow tile or cement blocks within eight inches of the soil. Hi-bor treated wood used for exterior portions of the structure (siding, fascia, etc.) must be protected at all times by an exterior waterproof coating of paint, water proofing sealant, etc.

Failure to observe these requirements may lead to failure of Hi-bor Brand Borate Pressure Treated Wood and shall void any and all warranties.

SEE WARRANTY FOR DETAILS.

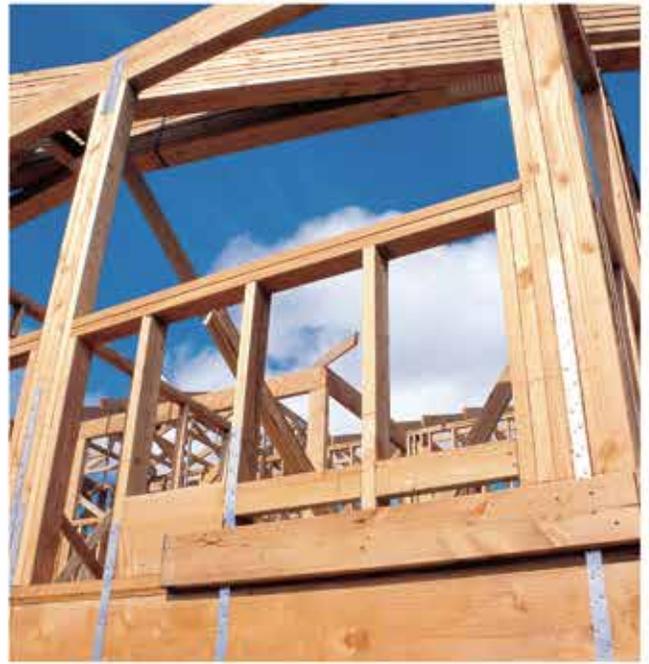

IMPORTANT INFORMATION

Please access the link below or QR code to read before handling treated wood. Guidelines for the proper use, handling, and disposal of treated wood products. Many of these precautions also apply to untreated wood and other building materials. These guidelines contain compliance information required by the California Department of Toxic Substances Control.

kopperspc.com/hi-bor/important-information.html



For information on how to safely dispose of treated wood waste in California.

twwdisposal.org/



**Performance
Chemicals**

1-800-585-5161

info@koppersperformancechemicals.com

www.kopperspc.com

Hi-bor Borate Pressure Treated Wood Products are produced by independently owned and operated wood preserving facilities.

Hi-bor is a registered trademark of Koppers Performance Chemicals Inc.

© 1/2026